declare_cmd :

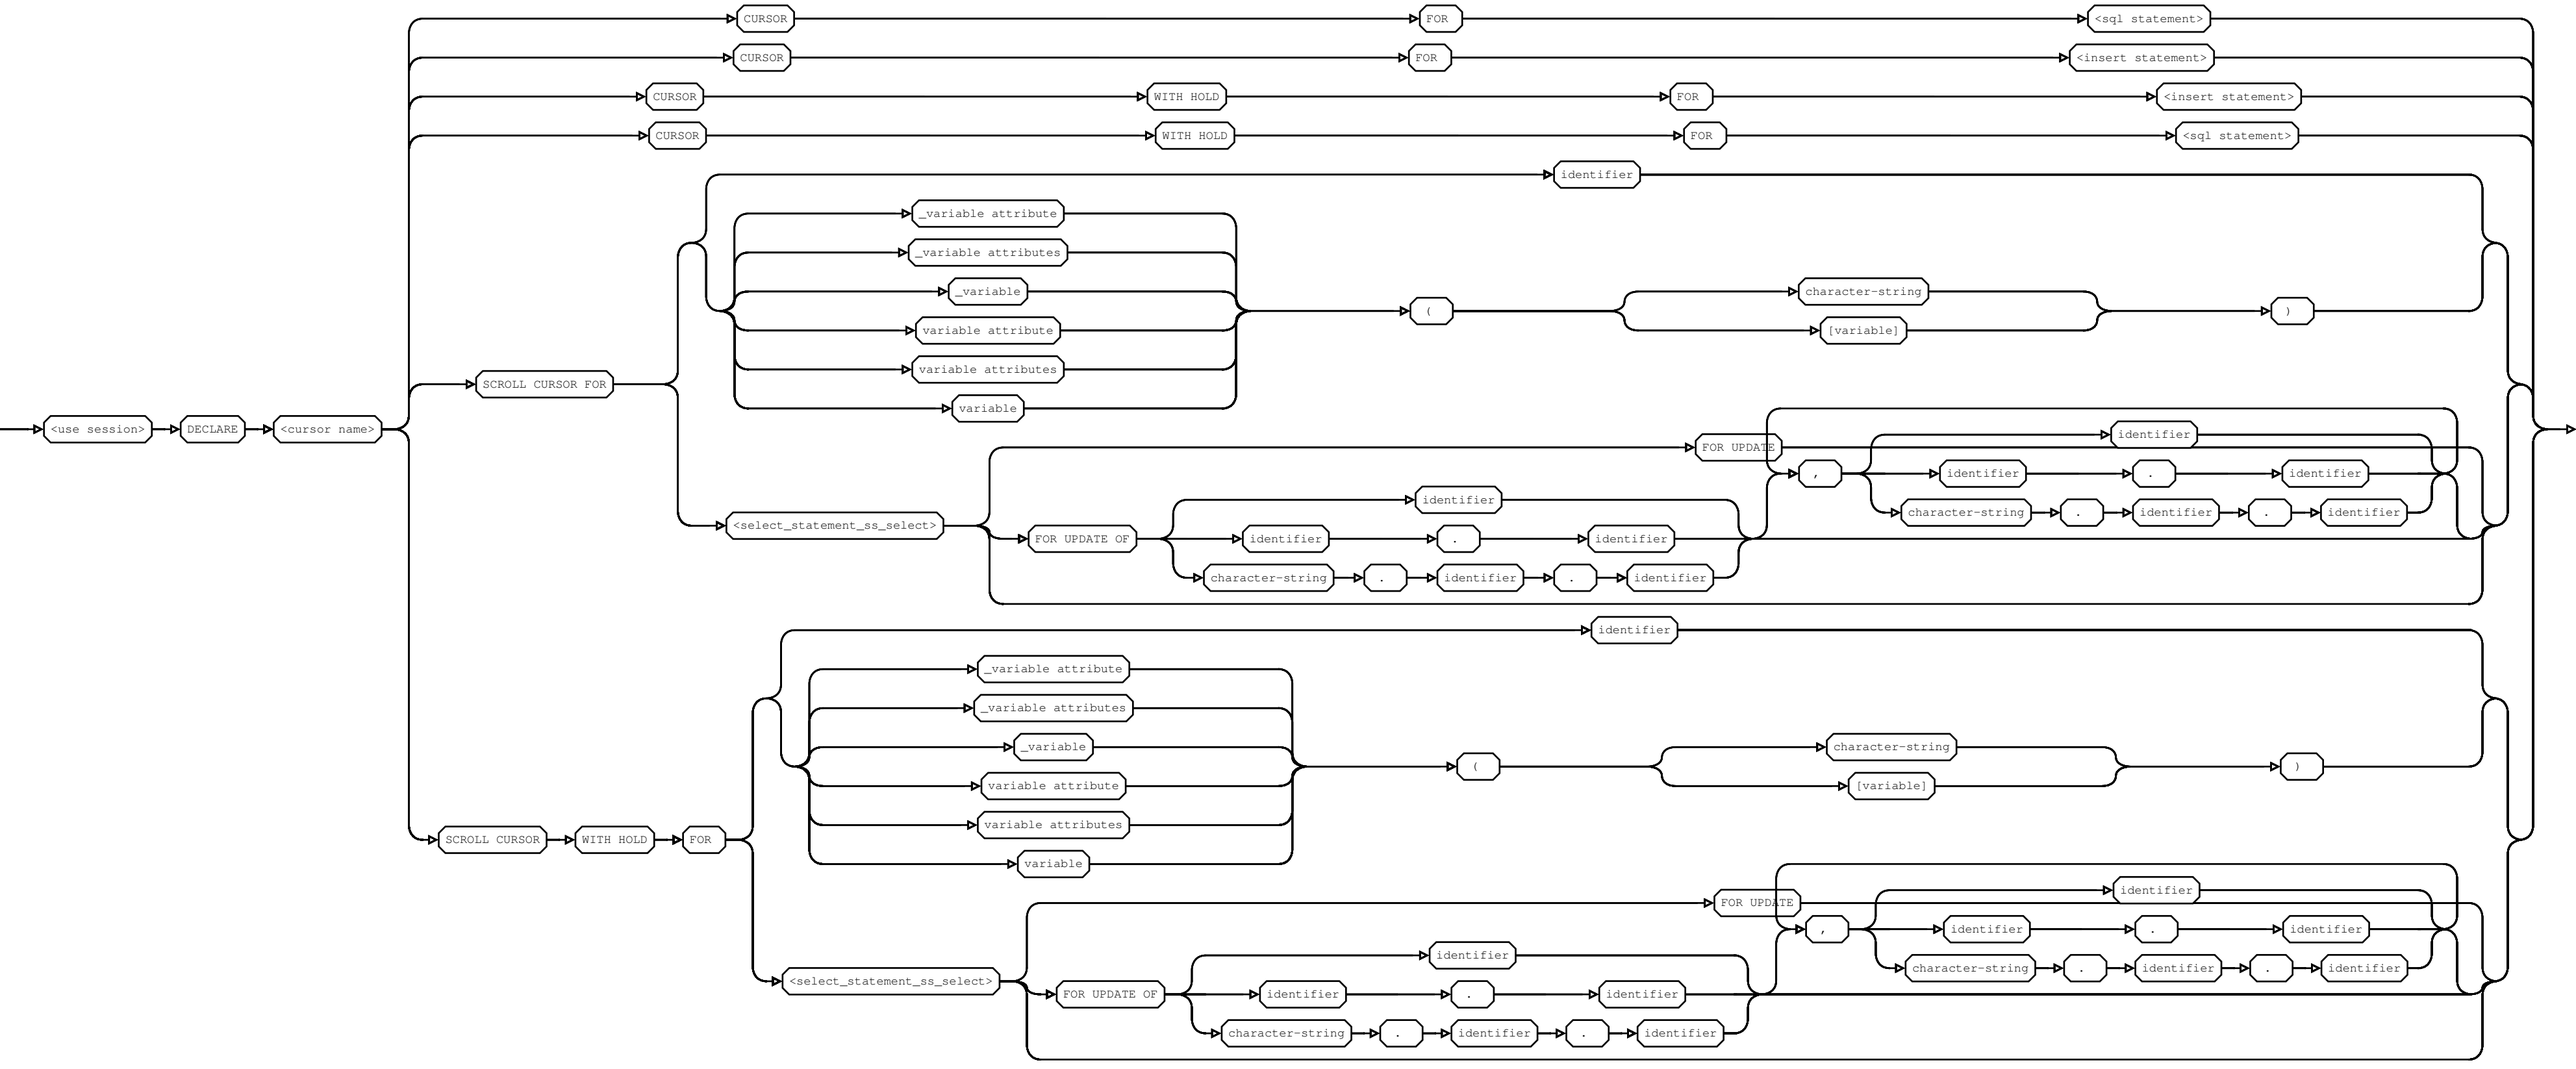
<use session>
DECLARE
<cursor name>
CURSOR
FOR
<sql statement>
CURSOR
FOR
<insert statement>
CURSOR
WITH HOLD
FOR
<insert statement>
CURSOR
WITH HOLD
FOR
<sql statement>
SCROLL CURSOR FOR
identifier
_variable attribute
_variable attributes
_variable
variable attribute
variable attributes
variable
(
character-string
[variable]
)
<select_statement_ss_select>
FOR UPDATE
FOR UPDATE OF
identifier
.
character-string
,
SCROLL CURSOR
WITH HOLD
FOR