**init_cmd :**

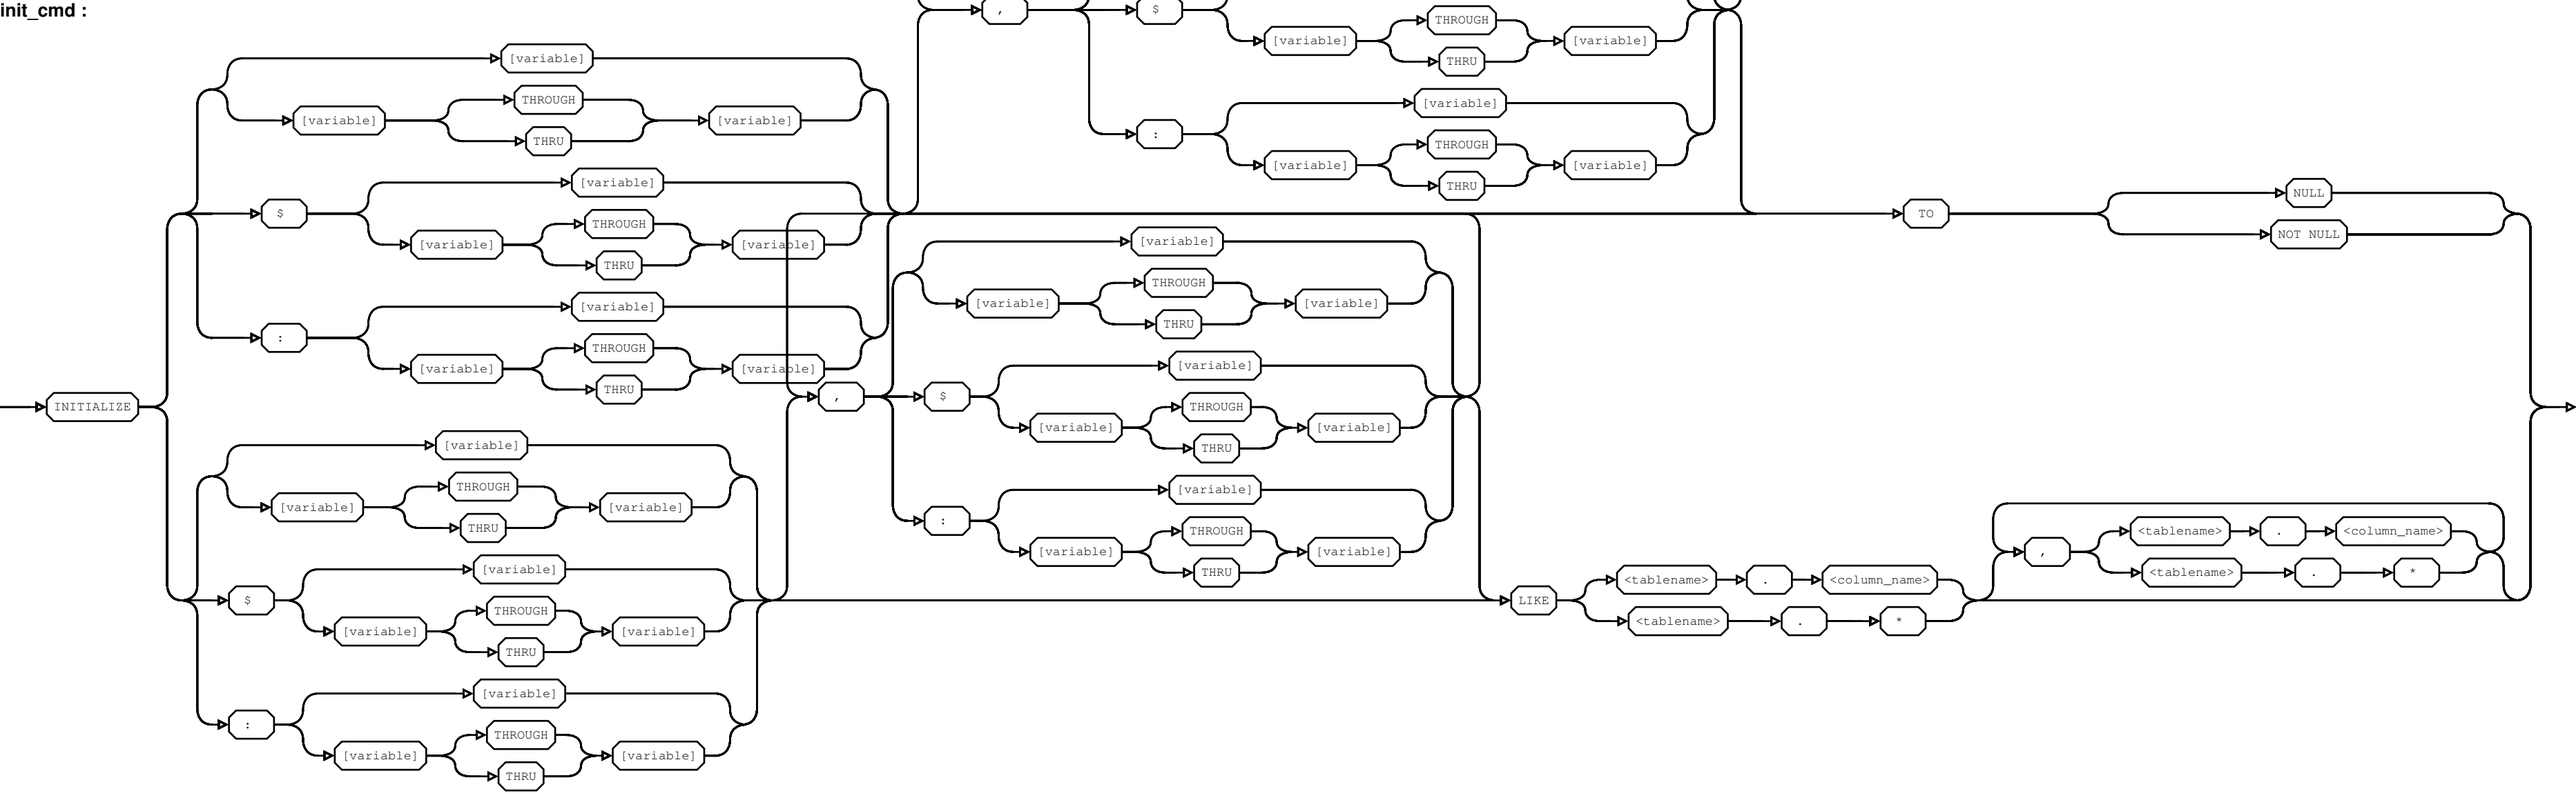
INITIALIZE
[variable]
THROUGH
THRU
$
:
,
TO
NULL
NOT NULL
LIKE
<tablename>
.
<column_name>
*