input_cmd :

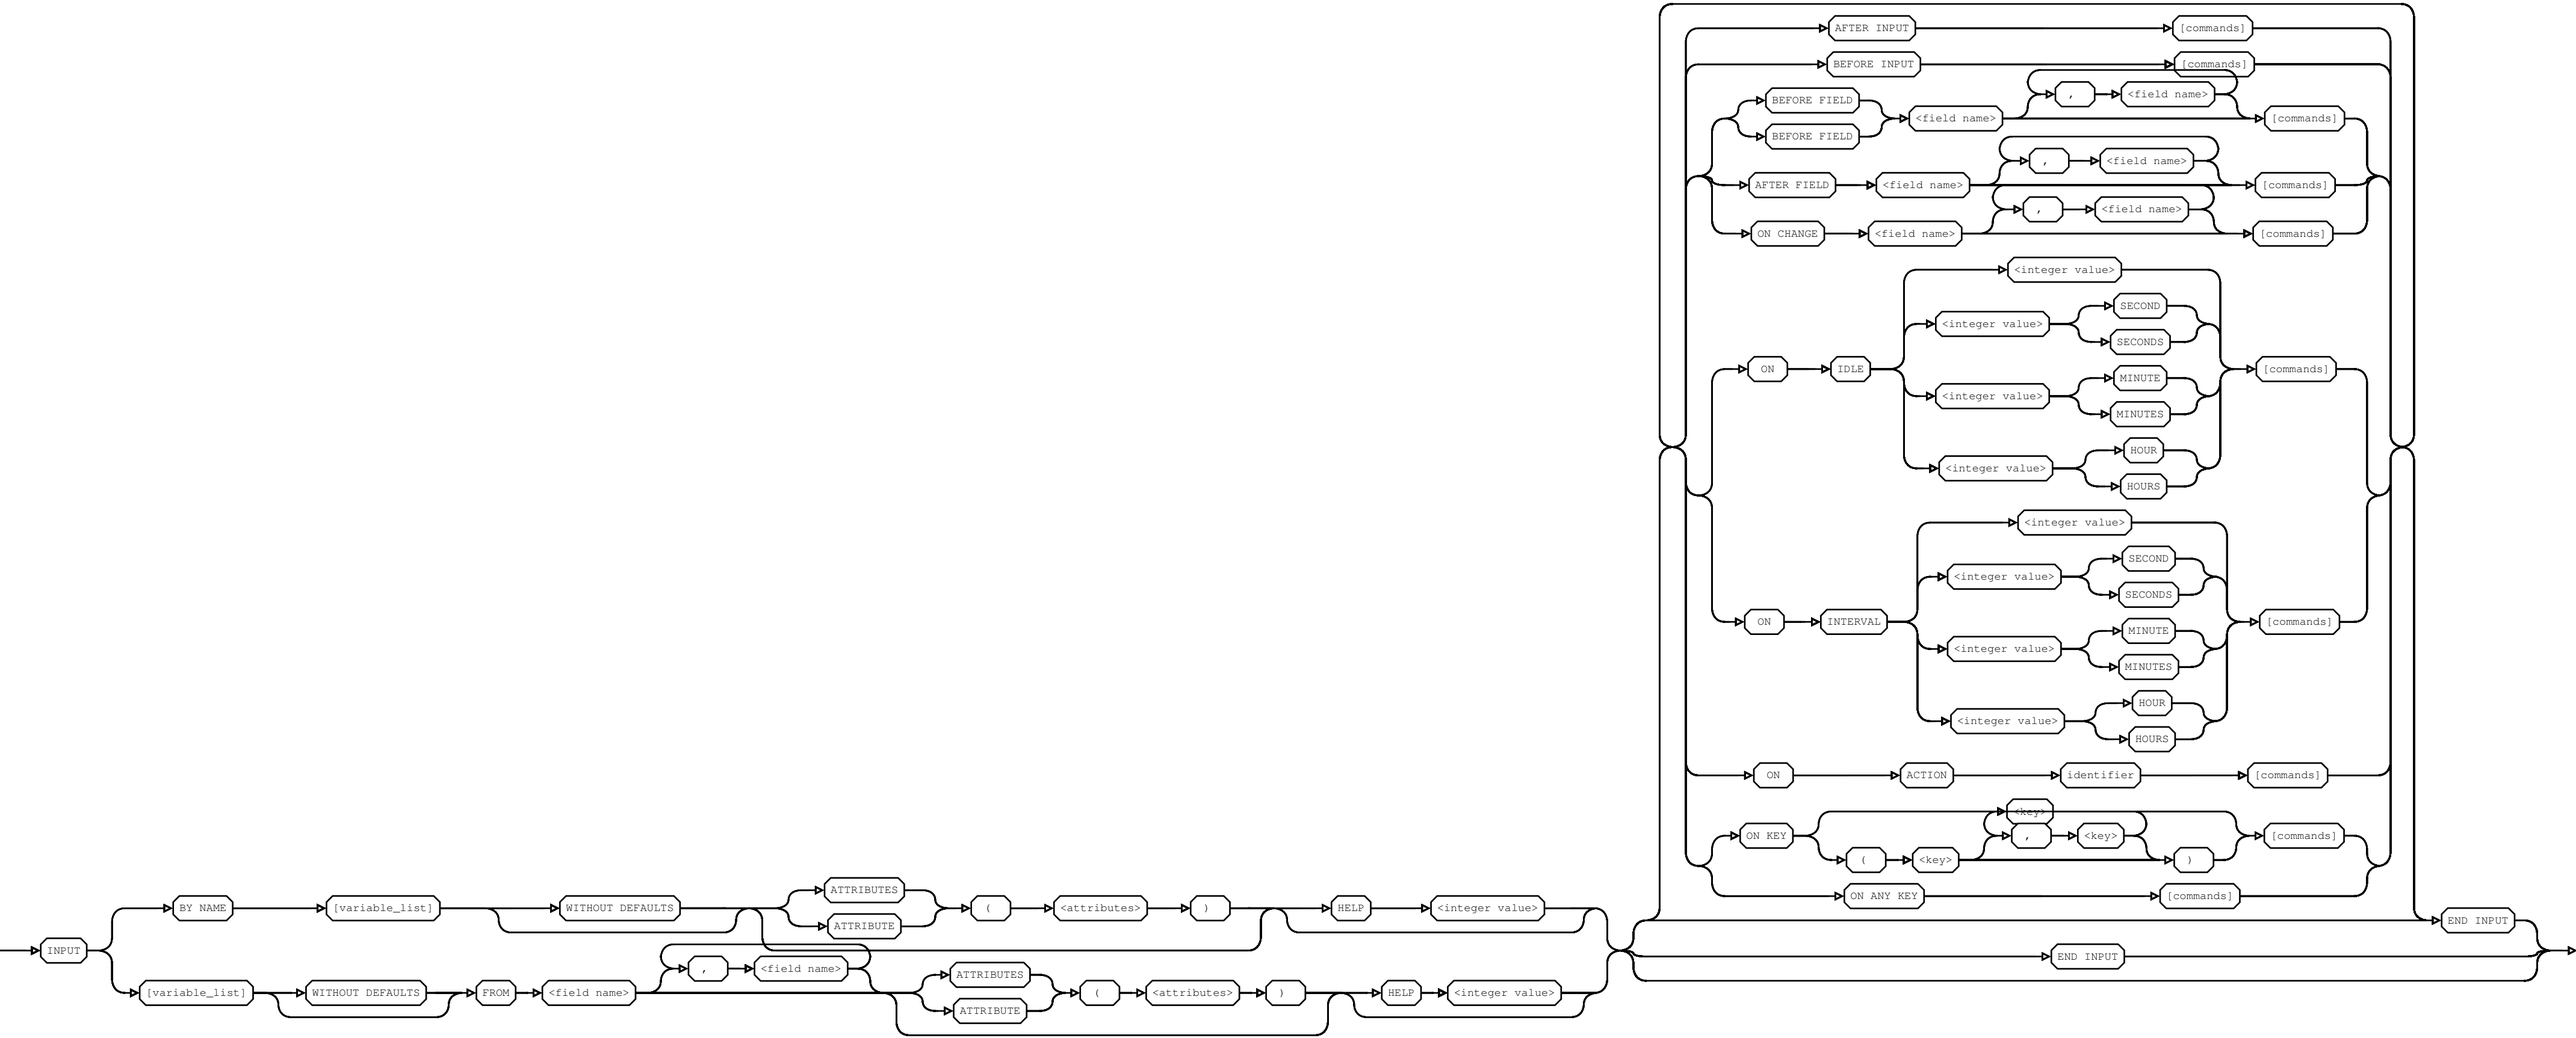
INPUT
BY NAME
[variable_list]
WITHOUT DEFAULTS
ATTRIBUTES
ATTRIBUTE
(
<attributes>
)
HELP
<integer value>
[variable_list]
WITHOUT DEFAULTS
FROM
<field name>
,
<field name>
ATTRIBUTES
ATTRIBUTE
(
<attributes>
)
HELP
<integer value>
AFTER INPUT
[commands]
BEFORE INPUT
[commands]
BEFORE FIELD
BEFORE FIELD
<field name>
,
<field name>
[commands]
AFTER FIELD
<field name>
,
<field name>
[commands]
ON CHANGE
<field name>
,
<field name>
[commands]
ON
IDLE
<integer value>
SECOND
SECONDS
MINUTE
MINUTES
HOUR
HOURS
[commands]
ON
INTERVAL
<integer value>
SECOND
SECONDS
MINUTE
MINUTES
HOUR
HOURS
[commands]
ON
ACTION
identifier
[commands]
ON KEY
(
<key>
,
<key>
)
[commands]
ON ANY KEY
[commands]
END INPUT
END INPUT